

FEATURES:

- Non-toxic
- Non-electric
- Non-radioactive
- Environmentally friendly
- Fire-resistant
- UV-stable
- Weather-resistant for outdoor applications
- Easily installed and maintained

TECHNICAL INFORMATION:

- Sizes: 2.375" x 48"

TESTS PASSED:


- RS 6-1 Illuminance Test ISO 17398 (NYC minimum BR: 30-8-5);
- ASTM E2072-00;
- Meets ICC-ES AC169;
- RS 6-1 cleaning test – ASTM D 4828;
- RS 6-1 flame spread test – ASTM D 635;
- RS 6-1 toxicity test – Bombardier SMP800-C;
- RS 6-1 radioactivity tests ASTM D3648.

POWER REQUIREMENTS:

- NO additional electrical or mechanical source required.

INSTALLATION:

- Easy, permanent installation. Screws and anchors supplied.

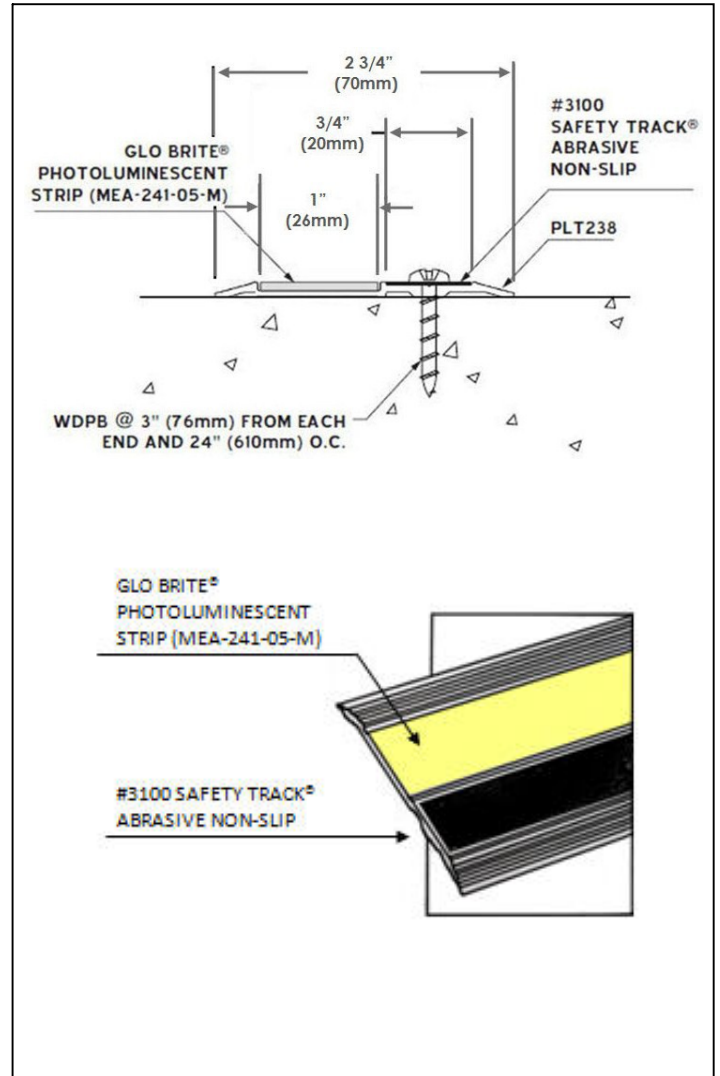

Catalog #	Dimensions	Description
7500-TREAD-1	2.375" x 48"	Aluminum stair tread with 1" wide PLM strip of 50F-1 and Black Anti-Slip Tape